

Series **Alure**



Alure Oval Pearl Mate 30x75 Rc Pb

30x75 RC PB



Technical Data




Series: ALURE
Product: Alure Oval Pearl Mate 30x75 Rc Pb
Size: 30x75 RC PB
Sales group: G.133
Type: WALL TILE

Type of material: White body
Slipperness R:
Class:
UPEC:
Finish: MATT

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
30x75 RC PB	Relief	7	1,575	21,278	54,000	85,050	1149,012

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Variations

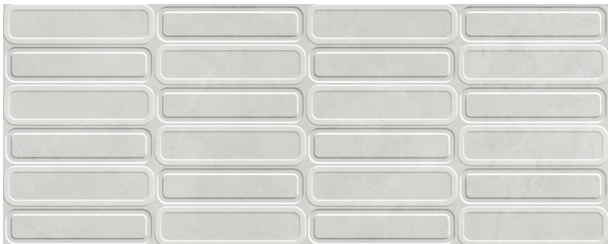

Variations



Technical Data**Alure Oval Pearl Mate 30x75 Rc Pb**

Family:	WALL TILE MATT
Absortion Group:	BIII
Size:	30x75 RC PB
Worz Size (mm):	750 x 300 x 8

**PHYSICAL CHARACTERISTICS**

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 ?C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB