


Series **Opal**



Opal Vison Brillo 7,5x30

7,5x30

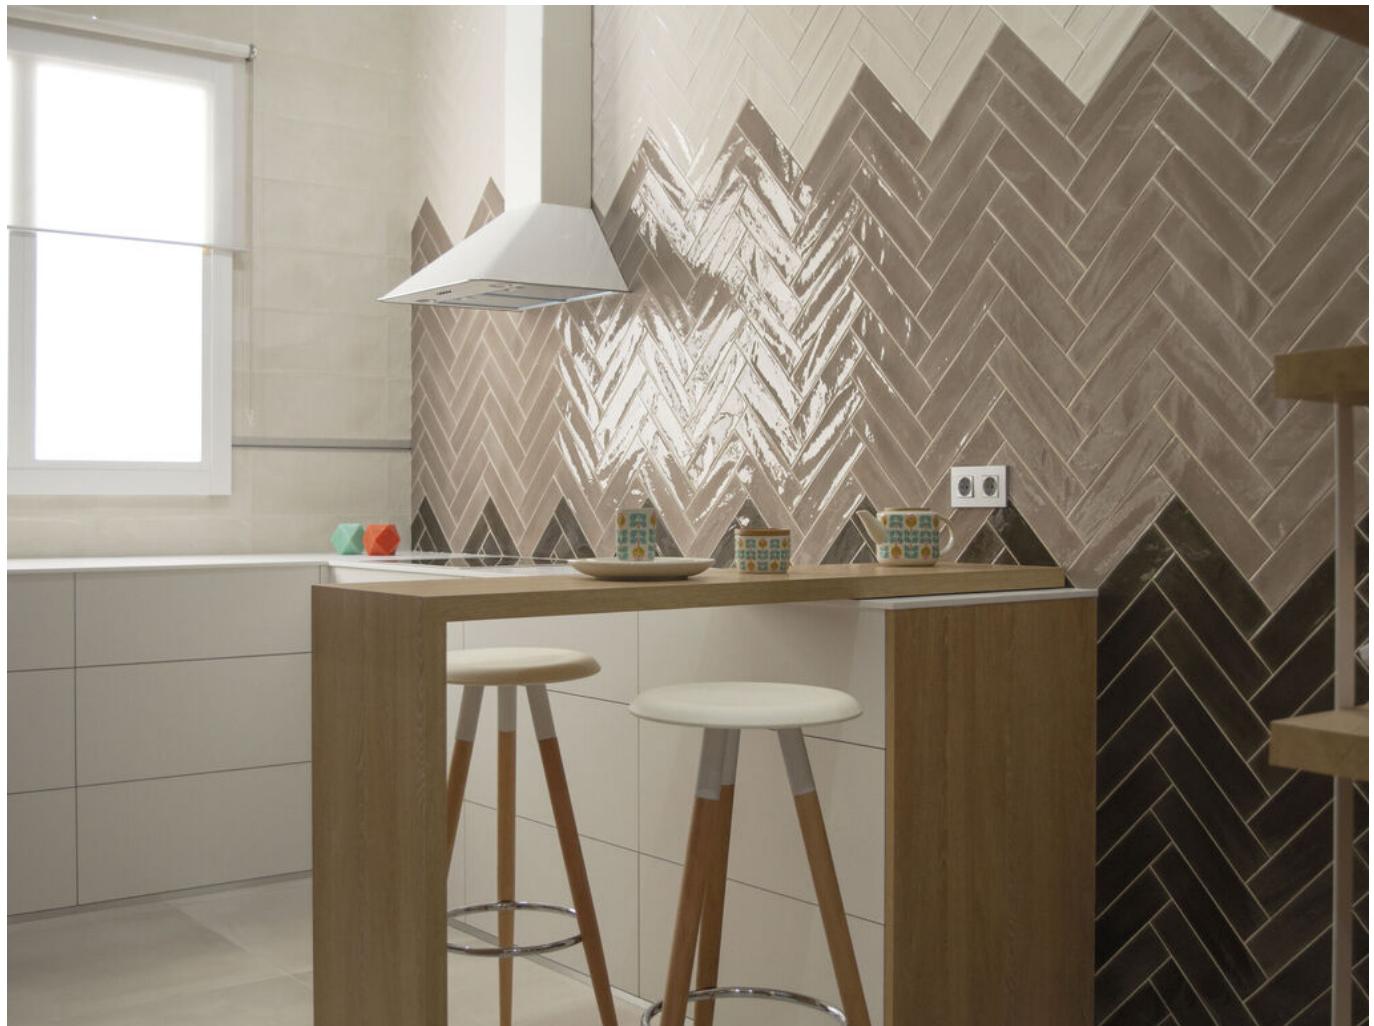

Technical Data



Series: OPAL
 Product: Opal Vison Brillo 7,5x30
 Size: 7,5x30
 Sales group G.125
 Type: WALL TILE

Type of material White body
 Slipperiness R:
 Class:
 UPEC:
 Finish: GLOSSY

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
7,5x30	Field Tile	22	0,500	6,950	96,000	48,000	667,200

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Variations

Technical Data

Opal Vison Brillo 7,5x30



Family:	WALL TILE GLOSSY
Absortion Group:	BIII
Size:	7,5x30
Worz Size (mm):	301 x 75,5 x 9

PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm ²)	UNE-EN-ISO 10545-4	>12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 °C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB