

Series **Borneo**



Borneo Arrow White Mate 60x120 Xs Rc Pb

60x120 XS RC



Technical Data

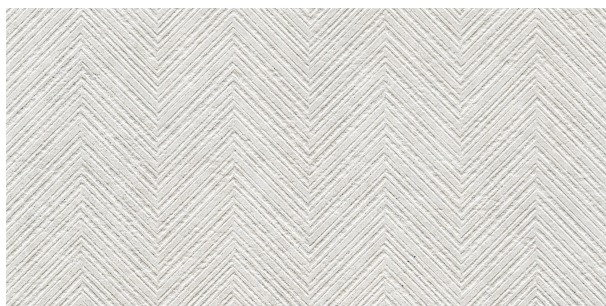
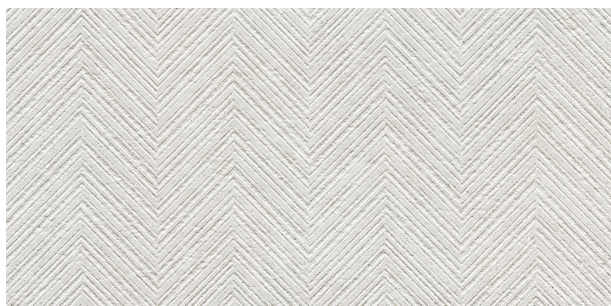
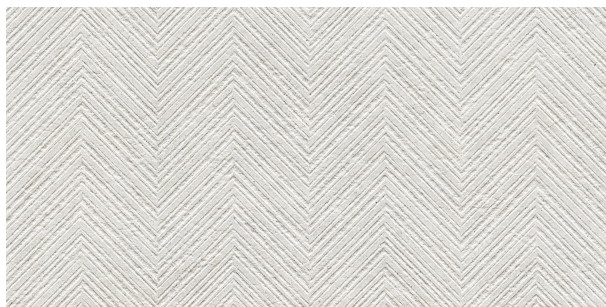
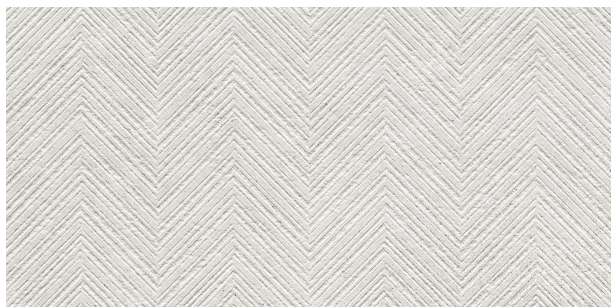


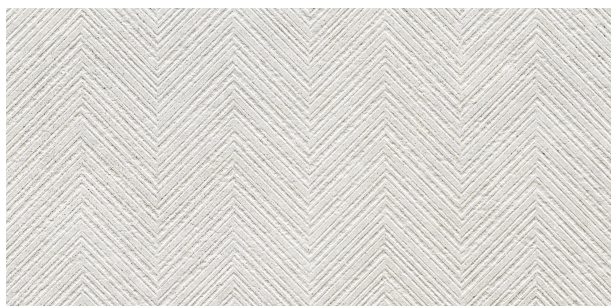
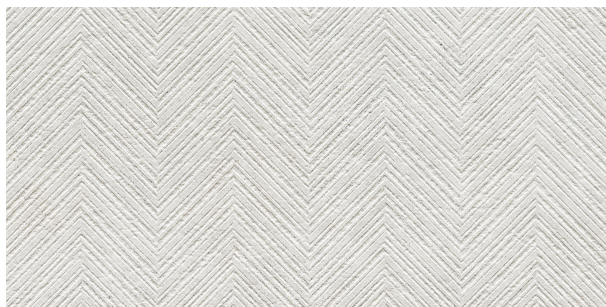
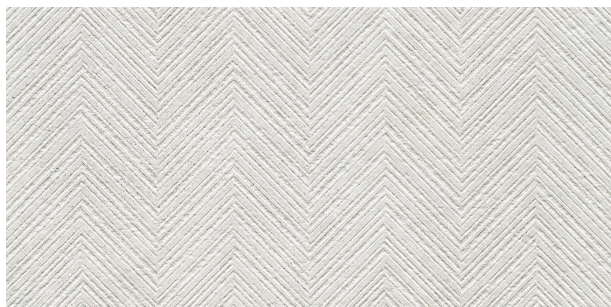
Series: BORNEO
Product: Borneo Arrow White Mate 60x120 Xs Rc Pb
Size: 60x120 XS RC
Sales group: G.183
Type: WALL TILE

Type of material: White body
Slipperness R:
Class:
UPEC:
Finish: MATT

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
60x120 XS RC	Relief	2	1,440	22,694	36,000	51,840	816,984

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Variations

Variations

Technical Data**Borneo Arrow White Mate 60x120 Xs Rc Pb**

Family: **WALL TILE MATT**
Absortion Group: **BIII**
Size: **60x120 XS RC**
Worz Size (mm): **1200 x 600 x 8,2**

**PHYSICAL CHARACTERISTICS**

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 ?C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB