


# Series **Alure**




# Alure White Mate 75x150 Rc

75x150 SL RC

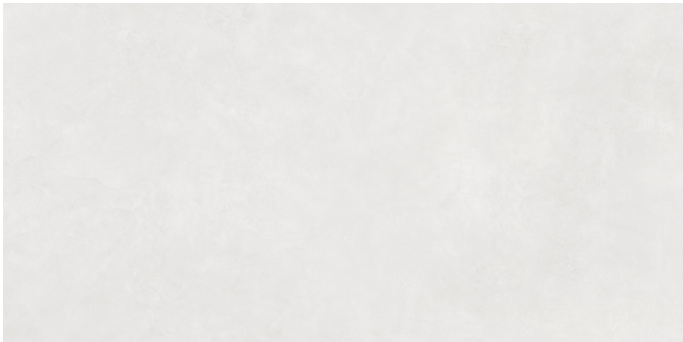

## Technical Data



Series: ALURE  
Product: Alure White Mate 75x150 Rc  
Size: 75x150 SL RC  
Sales group G.189  
Type: Porcelain tiles

Type of material Neutral Body  
Slipperness R:  
Class: Class 1  
UPEC:  
Finish: MATT

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
75x150 SL RC	Field Tile	1	1,125	25,738	42,000	47,250	1080,996

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

## **Variations**



Technical Data

Alure White Mate 75x150 Rc

Family: **Porcelain tiles MATT**  
Absortion Group: **Bla**  
Size: **75x150 SL RC**  
Worz Size (mm): **1500 x 750 x 9**



PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E<0,5%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>1300
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=35
Resistance to abrasion (PEI)	UNE-EN-ISO 10545-7	4
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	Complies with the standar
Scratch hardness according to Mohs	UNE-EN-ISO 67101	4
Slipperness resistance   Pendulum	UNE-EN 16165:2022 anexo C	Clase 1
Slipperness resistance   Inclined platform	UNE-EN 16165:2022 anexo B	
Slipperness resistance   Barefoot areas	UNE-EN 16165:2022 anexo A	
Reaction to fire	UNE-EN-ISO 13501-1	A1 - A1 FL
DCOF	DCOF	<0,42

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB