


Series **Cronos**



Cronos Cream Mate 60x60 Rc 20mm Antislip

60x60 20MM

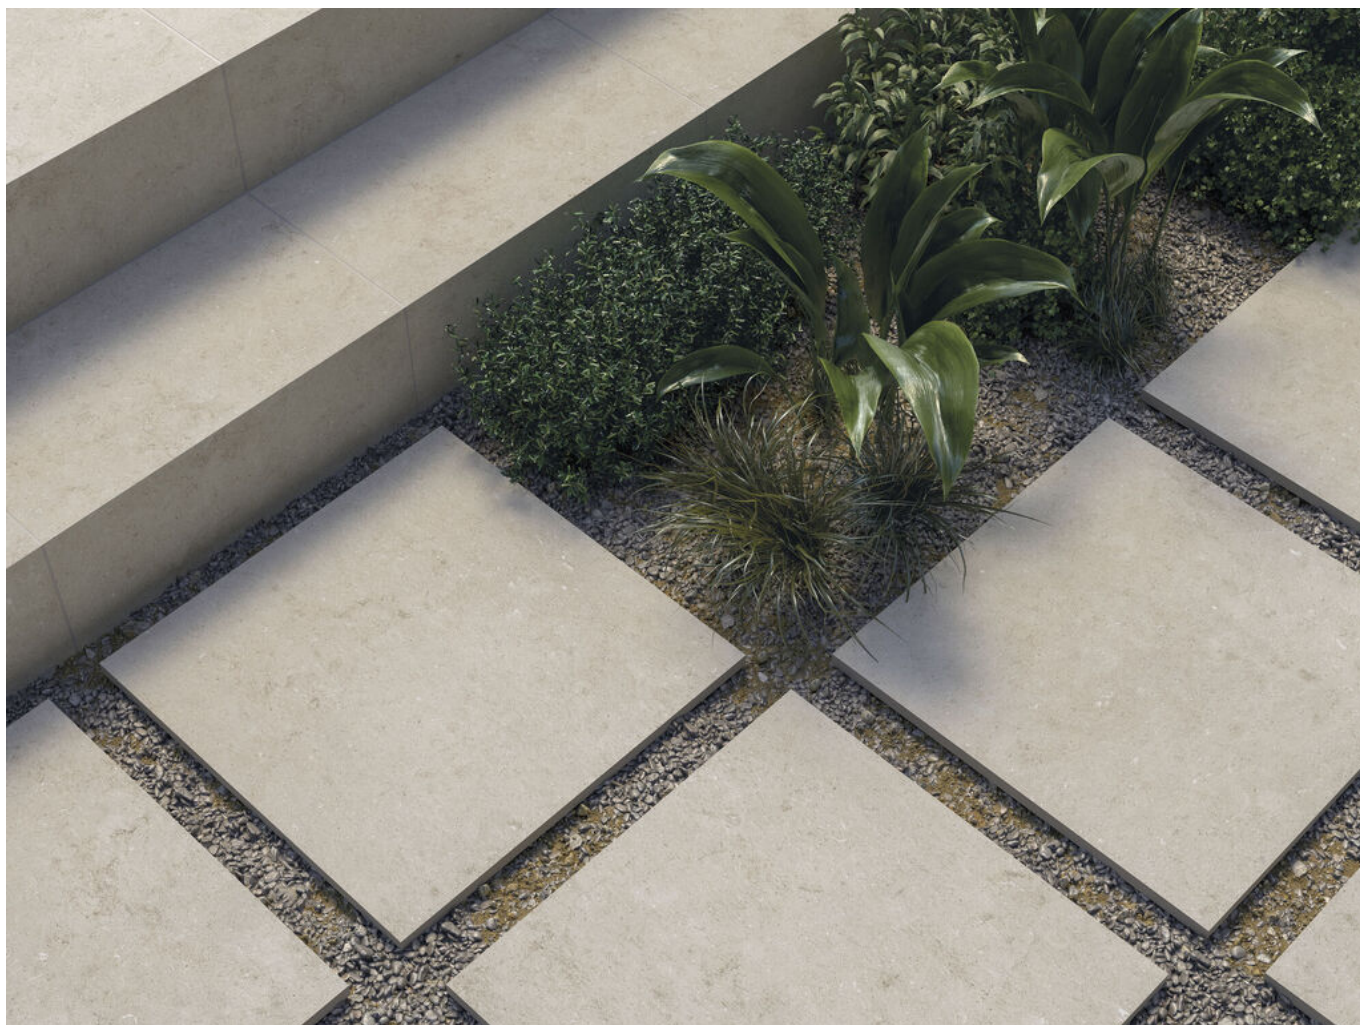

Technical Data



Series: CRONOS
Product: Cronos Cream Mate 60x60 Rc 20mm Antislip
Size: 60x60 20MM
Sales group: G.5083
Type: Porcelain tiles

Type of material: Neutral Body
Slipperness R: R11C
Class: Antislip
UPEC:
Finish: MATT

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
60x60 20MM	Field Tile	2	0,720	33,834	30,000	21,600	1015,020

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Variations



Variations



Technical Data

Cronos Cream Mate 60x60 Rc 20mm Antislip

Family: **Porcelain tiles MATT**
Absortion Group: **Bla**
Size: **60x60 20MM**
Worz Size (mm): **600 x 600 x 20**



PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E<0,5%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>1300
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=35
Resistance to abrasion (PEI)	UNE-EN-ISO 10545-7	4
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	Complies with the standar
Scratch hardness according to Mohs	UNE-EN-ISO 67101	8
Slipperness resistance Pendulum	UNE-EN 16165:2022 anexo C	Clase 3
Slipperness resistance Inclined platform	UNE-EN 16165:2022 anexo B	R11
Slipperness resistance Barefoot areas	UNE-EN 16165:2022 anexo A	C
Reaction to fire	UNE-EN-ISO 13501-1	A1 - A1 FL
DCOF	DCOF	>0,60

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB