Series **Galana**

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Galana Brillo 30x90 Rc

30x90 RC

Technical Data

Series: GALANA
Product: Galana Brillo 30x90 Rc
Size: 30x90 RC
Sales group G.104
Type: WALL TILE

Type of material White body
Slipperness R:
Class:
UPEC:
Finish: GLOSSY

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
30x90 RC	Field Tile	5	1,350	20,413	63,000	85,050	1286,019

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Variations

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Variations

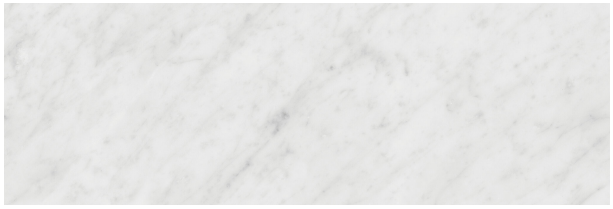

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Technical Data

Galana Brillo 30x90 Rc

Family:	**WALL TILE GLOSSY**
Absortion Group:	**BIII**
Size:	**30x90 RC**
Worz Size (mm):	**900 x 300 x 8,7**

PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 ?C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.