


# Series **Lixium**



## Lixium Black Pulido Granilla 60x120 Rc

60x120 RC

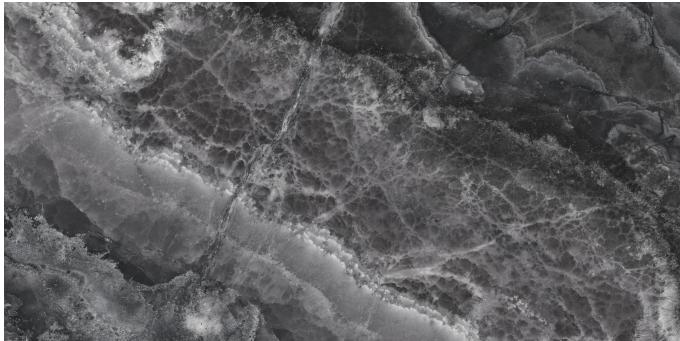

### Technical Data



Series: LIXIUM

Product: Lixium Black Pulido Granilla 60x120 Rc

Size: 60x120 RC

Sales group: G.155

Type: Porcelain tiles

Type of material: Neutral Body

Slipperiness R:

Class:

UPEC:

Finish: Premium polished

| Size      | Product type | Pcs/Box | M2/Box | Kg/Box | Boxes/Pallet | M2/Pallet | Kg/Pallet |
|-----------|--------------|---------|--------|--------|--------------|-----------|-----------|
| 60x120 RC | Field Tile   | 2       | 1,440  | 35,626 | 32,000       | 46,080    | 1140,032  |

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

## Technical Data

## Lixium Black Pulido Granilla 60x120 Rc

|                  |   |
|------------------|---|
| Family:          | <b>Porcelain tiles Premium polished</b> |
| Absortion Group: | <b>Bla</b>                              |
| Size:            | <b>60x120 RC</b>                        |
| Worz Size (mm):  | <b>1200 x 600 x 10,5</b>                |



## PHYSICAL CHARACTERISTICS

| CHARACTERISTICS                                 | STANDARD                  | VALUE                     |
|---|---------------------------|---------------------------|
| Dimensional tolerances and surface appearance   | UNE-EN-ISO 10545-2        | Complies with the standar |
| Water Absortion                                 | UNE-EN-ISO 10545-3        | E<0,5%                    |
| Breaking strenght (N)                           | UNE-EN-ISO 10545-4        | >1300                     |
| Flexural tensile strengthn (N/mm <sup>2</sup> ) | UNE-EN-ISO 10545-4        | >=35                      |
| Resistance to abrasion (PEI)                    | UNE-EN-ISO 10545-7        | 4                         |
| Thermal shock resistance                        | UNE-EN-ISO 10545-9        | Complies with the standar |
| Cracking resistance                             | UNE-EN-ISO 10545-11       | Complies with the standar |
| Frost resistance                                | UNE-EN-ISO 10545-12       | Complies with the standar |
| Scratch hardness according to Mohs              | UNE-EN-ISO 67101          | 4                         |
| Slipperness resistance   Pendulum               | UNE-EN 16165:2022 anexo C |                           |
| Slipperness resistance   Inclined platform      | UNE-EN 16165:2022 anexo B |                           |
| Slipperness resistance   Barefoot areas         | UNE-EN 16165:2022 anexo A |                           |
| Reaction to fire                                | UNE-EN-ISO 13501-1        | A1 - A1 FL                |
| DCOF  | DCOF                      | <0,42                     |

**CHEMICAL CHARACTERISTICS**

| CHARACTERISTICS                                     | STANDARD            | VALUE                      |
|---|---------------------|----------------------------|
| Resistance to staining                              | UNE-EN-ISO 10545-14 | Complies with the standars |
| Resistance to chemicals and pool treatment products | UNE-EN-ISO 10545-13 | Complies with the standars |
| Resistance to High concentration acids and bases    | UNE-EN-ISO 10545-13 | MIN HB                     |
| Resistance to Low concentration acids and bases     | UNE-EN-ISO 10545-13 | MIN LB                     |