

Series **Cronos**



Cronos Ivory Mate 30x60 SI Rc

30x60 SL RC



Technical Data



Series: CRONOS

Product: Cronos Ivory Mate 30x60 SI Rc

Size: 30x60 SL RC

Sales group: G.1078

Type: Porcelain tiles

Type of material: Neutral Body

Slipperiness R: R9A

Class: Class 1

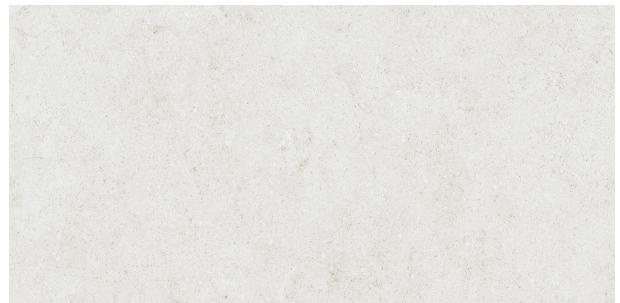
UPEC:

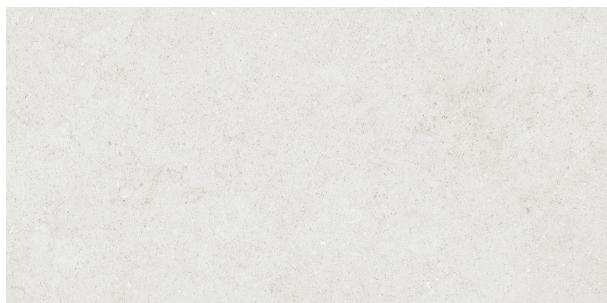
Finish: MATT

| Size | Product type | Pcs/Box | M2/Box | Kg/Box | Boxes/Pallet | M2/Pallet | Kg/Pallet |
|-------------|--------------|---------|--------|--------|--------------|-----------|-----------|
| 30x60 SL RC | Field Tile | 8 | 1,440 | 28,125 | 40,000 | 57,600 | 1125,000 |

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

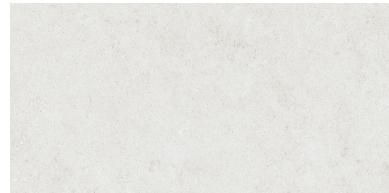
The results shown represent an indicative approximation. This document does not constitute a contractual relationship. To place orders or check product availability, please contact the company.

Variations

Variations

Technical Data

Cronos Ivory Mate 30x60 SI Rc



| | |
|------------------|-----------------------------|
| Family: | Porcelain tiles MATT |
| Absortion Group: | Bla |
| Size: | 30x60 SL RC |
| Worz Size (mm): | 600 x 298 x 9 |

PHYSICAL CHARACTERISTICS

| CHARACTERISTICS | STANDARD | VALUE |
|---|---------------------------|---------------------------|
| Dimensional tolerances and surface appearance | UNE-EN-ISO 10545-2 | Complies with the standar |
| Water Absortion | UNE-EN-ISO 10545-3 | E<0,5% |
| Breaking strenght (N) | UNE-EN-ISO 10545-4 | >1300 |
| Flexural tensile strengthn (N/mm ²) | UNE-EN-ISO 10545-4 | >=35 |
| Resistance to abrasion (PEI) | UNE-EN-ISO 10545-7 | 4 |
| Thermal shock resistance | UNE-EN-ISO 10545-9 | Complies with the standar |
| Cracking resistance | UNE-EN-ISO 10545-11 | Complies with the standar |
| Frost resistance | UNE-EN-ISO 10545-12 | Complies with the standar |
| Scratch hardness according to Mohs | UNE-EN-ISO 67101 | 5 |
| Slipperness resistance Pendulum | UNE-EN 16165:2022 anexo C | Clase 1 |
| Slipperness resistance Inclined platform | UNE-EN 16165:2022 anexo B | R9 |
| Slipperness resistance Barefoot areas | UNE-EN 16165:2022 anexo A | A |
| Reaction to fire | UNE-EN-ISO 13501-1 | A1 - A1 FL |
| DCOF | DCOF | >0,42 |

CHEMICAL CHARACTERISTICS

| CHARACTERISTICS | STANDARD | VALUE |
|---|---------------------|----------------------------|
| Resistance to staining | UNE-EN-ISO 10545-14 | Complies with the standars |
| Resistance to chemicals and pool treatment products | UNE-EN-ISO 10545-13 | Complies with the standars |
| Resistance to High concentration acids and bases | UNE-EN-ISO 10545-13 | MIN HB |
| Resistance to Low concentration acids and bases | UNE-EN-ISO 10545-13 | MIN LB |